

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 0 703 762 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
25.02.1998 Bulletin 1998/09

(21) Application number: 94900938.5

(22) Date of filing: 29.11.1993

(51) Int. Cl.<sup>6</sup>: **A61F 5/44**, A61L 25/00  
// B32B7/00, B32B27/00

(86) International application number:  
PCT/GB93/02452

(87) International publication number:  
WO 94/12128 (09.06.1994 Gazette 1994/13)

(54) **DRAINAGE BAG**  
**DRAINAGEBEUTEL**  
**POCHES POUR OSTOMIE**

(84) Designated Contracting States:  
AT BE CH DE DK ES FR GB GR IE IT LI LU MC NL  
PT SE

(30) Priority: 01.12.1992 GB 9225071

(43) Date of publication of application:  
03.04.1996 Bulletin 1996/14

(73) Proprietor:  
**WELLAND MEDICAL LIMITED**  
Crawley, West Sussex RH10 2TU (GB)

(72) Inventors:  
• **SMITH, Rory James Maxwell**  
North Yorkshire BD23 5EB (GB)

• **LITTLE, Gillian Rose**  
Essex CM11 1JB (GB)  
• **SHELLEY, Nicholas Steven**  
West Sussex RH15 0HX (GB)

(74) Representative:  
**Hutchins, Michael Richard et al**  
**FRY HEATH & SPENCE**  
The Old College  
53 High Street  
Horley Surrey RH6 7BN (GB)

(56) References cited:  
EP-A- 0 259 184      EP-A- 0 320 895  
GB-A- 2 064 333      US-A- 4 816 027

**EP 0 703 762 B1**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

This invention relates to ostomy bags and like drainage bags, and in particular to bags for which the contents can be disposed of more readily and hygienically by flushing down a W.C.

Ostomy bags for receiving bodily waste from colostomy or ileostomy patients are well known and examples of such bags are disclosed in, for example, EP-A-0259184 and EP-A-0320895.

A major problem with such bags is that it can be difficult to dispose of the used bag in a convenient and hygienic manner. Often, the contents of used bags are removed by cutting an edge of the bag and depositing the contents into a W.C. for flushing away, leaving the soiled bag for separate disposal, e.g. by incineration or by wrapping and placing in a waste bin. Disposal of a used bag and its contents in this way is clearly unhygienic and unpleasant for the user and, in recognition of this problem, various proposals have been made for ostomy bags which can be flushed down a W.C.: see for example GB-A-2083762, EP-A-0388924, GB-A-2227668, and GB-A-2193925.

However the ostomy bags currently available suffer from certain drawbacks. Firstly, due to the buoyancy and relative bulk of the bags, it is often difficult to flush them down the W.C. Secondly, in order to ensure that the bag is sufficiently strong and waterproof to withstand the rigours of use, materials have been used which do not decompose readily, if at all, in the sewerage system, thereby giving rise to a pollution problem.

The present invention seeks to overcome such problems by providing a relatively tough, waterproof detachable outer bag and a water-impermeable inner bag or liner, the inner bag serving to accommodate the bodily waste whilst the outer bag serves as a protective layer. The inner bag is made sufficiently water-impermeable to prevent leakage into the outer bag during the period of use but, because of the existence of the outer bag, need not be made of such durable material. Thus it can be made of material which although water-impermeable over a short period, nonetheless gradually dissolves over a more extended period. The inner bag can therefore be made entirely biodegradable and is ideally suited for disposal by flushing down a W.C. The outer bag which is secured to the inner bag by means of a frangible or peelable connection is torn away from the inner bag after use and, since it is not soiled by the bodily waste can be disposed of with other household refuse.

Accordingly, in a first aspect, the present invention provides a drainage bag for receiving bodily waste, the drainage bag comprising:

an outer bag;

a water-impermeable inner bag enclosed within the outer bag, the inner bag being of a structure which is weakened upon immersion in a WC bowl such that it becomes limp and is less buoyant thereby enabling it to be flushed away easily;

and means defining an orifice to enable bodily waste to be received by the inner bag;

characterised in that

the outer bag is water-impermeable and is formed from a material which acts as a barrier to flatus gases;

the outer bag is provided with a flatus filter;

the inner bag is permeable to flatus gases;

and the outer and inner bags are detachably secured together in the region of the orifice.

The outer and inner bags are preferably detachably secured together by means of a frangible or peelable connection or linkage therebetween.

The means defining the orifice can take the form of a flange, for example an adhesive flange of the type conventionally used with ostomy bags. Typically, one surface of the flange is provided with a layer of bioadhesive, e.g. a hydrocolloid adhesive, whilst the inner and outer bags are attached to the other surface of the flange. The inner and outer bags can conveniently be attached to the flange by means of welding, for example thermal welding, or by the use of adhesive or adhesive layers or by a combination of welding and adhesive techniques.

The outer bag preferably is attached by means of a frangible connection to the flange so as to be detachable therefrom, e.g. by tearing along a line of weakness. The line of weakness preferably is in the region of the weld and most preferably is created (e.g. by over-embossing with the welding tool) whilst the outer bag is being welded to the flange.

Alternatively, a peelable union can be provided through the selection of an appropriate adhesive. The said adhesive could be applied directly to either the outer bag material or to the hydrocolloid flange. Alternatively, the hydrocolloid adhesive itself may be employed. The adhesive could also be provided on a separate adhesive layer which could itself be either attached by, for example, welding or adhesively to either the outer bag material or to the hydrocolloid flange.

The inner bag or liner in general is attached to the flange in a more permanent manner; there being no line or area of weakness to enable detachment of the inner bag.

The outer bag is formed of a material which acts as a barrier to flatus gases. Examples of materials from which the outer bag can be formed include polyvinyl chloride (PVC), polyvinyl dichloride (PVDC), ethylene vinyl alcohol, and

related materials and combinations thereof. However, in order to prevent the undesirable build-up of flatus gases within the bag, the wall of the outer bag is provided with a flatus filter which permits the egress of gas from the bag but which filters out malodorous and noxious gases. Such filters, which can contain activated charcoal for the absorption of malodorous and noxious gases, are well known and need not be described in detail here.

As stated hereinbefore, the outer bag is intended to be torn or peeled away from the inner bag and flange after use and, since it is not soiled by the collected waste materials, it can simply be disposed of in a waste bin along with other household waste. Thus, it is not necessary for the outer bag to be water-soluble, or even biodegradable over a short period. Consequently, the outer bag can be made as tough and as waterproof as the circumstances of use demand.

However, the inner bag is intended to be flushable and consequently is of a structure which is weakened upon immersion in a W.C. bowl, such that it becomes limp and is less buoyant thereby enabling it to be flushed away easily.

Preferably, the inner bag is formed so as to have a water-impermeable layer and, disposed externally thereof, a water-soluble layer. For example, the inner bag can be formed from a polymeric film which is water-impermeable and only marginally water-soluble on one surface thereof, and highly water-soluble on another surface thereof. With such an arrangement, upon immersion of the inner bag in water, the water-soluble layer dissolves rapidly, weakening the inner bag, such that it becomes limp thereby allowing it to be flushed more readily.

In one embodiment the inner bag can be formed of a material comprising two polymeric films laminated together, one polymeric film being water-impermeable and the other polymeric film being water-soluble. The two polymeric films can be formed of different polymers, or they can be formed of substantially the same type of polymer, but wherein one film has been treated to render it water-impermeable. Alternatively, the inner bag can be formed from two different grades of the same polymer. The two films can be of approximately the same thickness and tensile strength. Examples of polymeric materials which can be employed include polyvinyl alcohol, alginates, starches and starch derivatives and cellulose derivatives.

In another embodiment, the water-soluble layer can comprise a water-soluble polymer in fibrillated film, net or textile form (e.g. a non-woven form) laminated to the water-impermeable layer.

The water-soluble layer typically is formed of a material such that at least 50%, preferably 75% and more preferably 90% by weight, disperses or dissolves in water at 50° within 10 seconds.

Although the inner bag is water-impermeable, it is nevertheless most preferred that the entire inner bag should be biodegradable, and preferably complete degradation of the bag occurs within five days of immersion in mildly turbulent water.

The inner bag can advantageously be lined with a fine coating of a hydrophobic material such as silicones, PTFE, oils, waxes and lacquers, or a coating of a metallic film or deposited metal layer which serves to increase water-impermeability whilst not adding appreciably to the mechanical strength of the bag.

In a further embodiment, the present invention provides a drainage bag (e.g. an ostomy bag) for receiving bodily waste as herein before defined, the inner bag being formed from a polymeric material, the inner surface of which bears a coating of a hydrophobic material, e.g. as hereinbefore defined, or a metallic coating or deposited metal layer which is substantially impermeable to water.

The invention will now be illustrated, but not limited, by reference to the specific embodiment shown in the accompanying drawings, in which:-

Figure 1 is a view from one side of an ostomy bag according to one embodiment of the invention;

Figure 2 is a sectional view of the ostomy bag of Figure 1;

Figure 2A is an enlarged view of the portion marked A in Figure 2;

Figure 2B is an enlarged view corresponding to the portion marked A in Figure 2 but illustrating an alternative form of construction;

Figure 3 is a side view showing the ostomy bag of Figures 1 and 2 in a partially disassembled state;

Figure 4 is a side view showing the inner liner bag of the embodiment shown in Figures 1 to 3;

Figure 5 is a side sectional view illustrating the mode of attachment of the ostomy bag to a patient; and

Figure 6 is a side sectional view showing the detachment of the outer bag from the inner liner.

Referring to the drawings, it can be seen that an ostomy bag according to one embodiment of the invention comprises an outer bag 1 and an inner bag or liner 2. The outer bag 1 and liner 2 have openings at their upper ends and are both secured by thermal welding to one surface of the annular flange 3. Annular flange 3 is provided on its external surface with a layer of hydrocolloid adhesive 4 which enables the bag to be affixed to the body wall of a patient about the stomal opening: see Figures 5 and 6. A peelable paper layer 5 protects the hydrocolloid adhesive prior to use.

In the upper part of the outer bag 1 there is provided an elongate array of perforations 6 in the bag wall. Flatus filter 7, which is of conventional construction, but is of elongate form rather than the conventional circular form, is secured against the inner surface of the bag wall, and serves to allow flatus gases to escape from the bag, the malodorous or noxious components of the flatus gases being retained by the filter. The elongate form of the filter serves as a finger-

grip which assists in the tearing away of the outer bag 1. However, the filter need not be of this shape, and the conventional round filter can be used if desired.

Outer bag 1 is formed from two sheets 1a and 1b of a tough, flexible, transparent, waterproof material such as polyvinyl chloride, polyvinyl dichloride, ethylene vinyl alcohol, related material or combinations thereof, which is substantially impermeable to gases, at least over the period of use of the bag. The two sheets 1a and 1b are welded together around their peripheries in standard fashion.

The manner of attachment of the outer bag 1 to the annular flange 3 is illustrated in more detail in Figure 2A. Thus, in addition to the depressions 8 left by the welding tool when the bag 1 is welded to the flange 3, there is a much deeper depression 9 formed by "over-embossing" with the welding tool and this represents an annular line of weakness.

An alternative mode of attachment is shown in Figure 2B. According to this alternative embodiment, the outer bag 1 is not welded to the flange 3 but rather is secured with peelable double-sided adhesive tape 12.

The inner bag or liner 2 is similarly formed from two sheets 2a and 2b welded together around their peripheries, but the sheets 2a and 2b are of laminar structure being formed from discrete films 10a and 11a, and 10b and 11b respectively. The films 10a and 10b in this embodiment are formed from a grade of polyvinyl alcohol which is only slowly soluble in cold water but is soluble in hot water. Examples of such a material are the "BP 26 mic", "LA-60 25 mic" and "NP 40 mic" grades of polyvinyl alcohol films manufactured by The Aicello Chemical Company Limited, Aichi, Japan, the properties of which are given in Section III of Table 1.

The films 10a and 10b function as the water-impermeable layer.

Films 11a and 11b, in this embodiment, are formed of a more soluble grade of polyvinyl alcohol, for example one of the cold water-soluble partially hydrolysed grades set out in section I of Table 1 or the cold water-soluble modified copolymer grades set out in Section II of Table 1 below.

**TABLE 1**

**PVA FILMS :- MECHANICAL CHARACTERISTICS**

20°C, 60%RH

Item Grade	Tensile str. (kg/cm <sup>2</sup> )		Elongation (%)		10% Young's Modulus		Impact strength at -10°C kg-cm (14° F)
	MD	TD	MD	TD	MD	TD	
KA 40 mic.	2.6 - 3.1	2.3 - 3.8	290 - 340	330 - 380	3.0 - 5.0	3.5 - 5.0	7.00
KB 40 mic.	2.5 - 3.0	2.0 - 2.5	300 - 350	350 - 400	3.0 - 5.0	3.0 - 5.0	9.00
KC 40 mic.	2.9 - 3.5	2.0 - 2.3	250 - 300	310 - 360	3.0 - 5.0	3.0 - 5.0	9.00
KD 40 mic.	2.8 - 3.3	2.0 - 2.4	330 - 380	330 - 380	3.0 - 5.0	3.0 - 5.0	>10.00
KL 40 mic.	2.6 - 3.1	2.0 - 5.5	240 - 290	230 - 290	4.0 - 6.0	4.5 - 6.5	7.00
NA 20 mic.	2.7 - 3.2	2.4 - 2.9	160 - 210	180 - 230	7.0 - 9.0	7.0 - 9.0	3.00
SA 17 mic.	1.3 - 1.8	1.1 - 1.6	200 - 250	200 - 250	4.5 - 6.5	4.5 - 6.5	3.00
PH 40 mic.	1.3 - 1.8	1.0 - 1.5	240 - 290	280 - 330	2.0 - 4.0	2.0 - 4.0	6.00
PW 40 mic.	3.5 - 4.0	3.2 - 3.7	190 - 240	190 - 240	7.5 - 9.5	7.5 - 9.5	8.00
BP 26 mic.	2.5 - 3.0	3.3 - 3.8	270 - 320	340 - 390	6.0 - 8.0	6.0 - 8.0	5.00
LA-60 25 mic.	3.1 - 3.6	3.1 - 3.6	280 - 330	300 - 350	7.0 - 9.0	7.0 - 9.0	7.00
NP 40 mic.	3.6 - 4.0	3.3 - 4.0	250 - 300	280 - 320	6.1 - 7.3	4.5 - 7.6	8.00

Temperature 20°C

As can be seen from Table 1, films 10a, 10b and 11a, 11b are of approximately the same mechanical strength as defined by their tensile strengths, elongation, Young's Modulus and Impact Strengths.

In use, the ostomy bag is applied to the patient as shown in Figure 5. When the bag is full and/or it is desired to remove the contents, the outer bag 1 is detached from the flange 3 by tearing along the line of weakness 9, as shown in Figures 3 and 5. Alternatively, if the outer bag 1 is secured to flange 3 by means of adhesive or adhesive tape, it can simply be peeled away from the flange 3. The outer bag wall in general is uncontaminated by bodily waste and can be disposed of by placing in a domestic household waste bin. The inner bag 2 is carefully removed from the body and dropped into the bowl of a W.C. The water-soluble layers 11a, 11b of the inner bag 2 rapidly dissolve causing the inner bag to become limp thereby conforming more closely to the contours of its contents and reducing its buoyancy. The inner bag 2 can then be easily flushed away.

The foregoing description is merely exemplary of one embodiment of the invention and it will readily be apparent that numerous modifications and alterations can be made without departing from the principles underlying the invention. For example, the layer 11a, 11b of the inner bag can be replaced by a layer of fibrous or non-woven textile material. In addition, or alternatively, the layer 10a, 10b can be provided with a hydrophobic coating or a deposited metallic layer to provide a longer-lasting water-impermeability. Such a coating or metallic layer need only be a few molecules thick and would not impart any appreciable additional mechanical strength to the bag.

All such modifications and alterations are intended to be embraced by this application.

## Claims

20

1. A drainage bag for receiving bodily waste, the drainage bag comprising:

an outer bag (1);  
a water-impermeable inner bag (2) enclosed within the outer bag (1), the inner bag (2) being of a structure which is weakened upon immersion in a WC bowl such that it becomes limp and is less buoyant thereby enabling it to be flushed away easily;  
and means (3) defining an orifice to enable bodily waste to be received by the inner bag (2);  
characterised in that

the outer bag (1) is water-impermeable and is formed from a material which acts as a barrier to flatus gases;  
the outer bag (1) is provided with a flatus filter (7);  
the inner bag (2) is permeable to flatus gases;  
and the outer (1) and inner (2) bags are detachably secured together in the region of the orifice.

35

2. A drainage bag according to Claim 1 which is an ostomy bag.

3. A drainage bag according to Claim 1 wherein the inner (2) and outer (1) bags are detachably secured together by means of a frangible or peelable connection or linkage.

40

4. A drainage bag according to any one of Claims 1 to 3 wherein the means defining the orifice is a flange (3), on one side of which is an adhesive (4) for adhering the bag to a patient and on the other side of which are attached the inner (2) and outer (1) bags.

- 45 5. A drainage bag according to Claim 4 wherein the outer bag (1) is frangibly or peelably attached to the flange (3).

6. A drainage bag according to Claim 5 wherein the outer bag (1) is welded to the flange (3) and is detachable therefrom by virtue of a line of weakness (9) in the region of the weld.

- 50 7. A drainage bag according to Claim 5 in which the outer bag (1) is adhesively secured to the flange (3) either directly or via an additional layer.

8. A drainage bag according to any one of the preceding Claims wherein the inner bag (2) is formed so as to have a water-impermeable layer (10a, 10b) and, disposed externally thereof, a water-soluble layer (11a, 11b).

55

9. A drainage bag according to Claim 8 wherein the inner bag (2) is formed from a polymeric film which is water-impermeable and only marginally water-soluble on one surface thereof and highly water-soluble on another surface thereof.

10. A drainage bag according to Claim 8 wherein the inner bag (2) is formed of a material comprising two polymeric films laminated together, one polymeric film (10a, 10b) being water-impermeable, and the other polymeric film (11a, 11b) being water-soluble.
- 5 11. A drainage bag according to Claim 10 wherein both polymeric films are formed of substantially the same type of polymer, but wherein one film has been treated to render it water impermeable.
12. A drainage bag according to Claim 11 wherein the polymeric films are of approximately the same thickness and tensile strength.
- 10 13. A drainage bag according to Claim 8 wherein the water-soluble layer comprises a water-soluble polymer in fibrillated film, net or textile form laminated to the water-impermeable layer.
14. A drainage bag according to any one of Claims 8 to 13 wherein the water-soluble layer is formed of a material such  
15 that at least 50% by weight disperses or dissolves in water at 50°C within 10 seconds.
15. A drainage bag according to any one of the preceding Claims wherein the inner bag (2) is biodegradable.
16. A drainage bag according to any one of the preceding Claims wherein the inner bag (2) is formed of a material such  
20 that substantially complete degradation of the bag occurs within 5 days of immersion in mildly turbulent water.
17. A drainage bag for receiving bodily waste, according to any one of Claims 1 to 14 wherein the inner bag (2) is formed from a polymeric material, the inner surface of which bears a coating of a hydrophobic material, or a metallic coating or deposited metal layer which is substantially impermeable to water.

## Patentansprüche

1. Drainagebeutel zur Aufnahme von Körperausscheidungen, wobei der Drainagebeutel folgende Teile umfaßt:

30 einen äußeren Beutel (1);  
einen wasserundurchlässigen inneren Beutel (2), der in dem äußeren Beutel (1) eingeschlossen ist, wobei der innere Beutel (2) eine Struktur aufweist, die bei Eintauchen in eine Toilettenschale geschwächt wird, so daß der Beutel schlaff wird und einen geringeren Auftrieb aufweist, so daß er leicht fortgespült werden kann, und Einrichtungen (3), die eine Öffnung bilden, um die Aufnahme von Körperausscheidungen von dem inneren  
35 Beutel (2) zu ermöglichen, dadurch gekennzeichnet, daß

der äußere Beutel (1) wasserundurchlässig ist und aus einem Material hergestellt ist, das als Sperre für Blähungsgase wirkt,  
40 der äußere Beutel (1) mit einem Blähungsgasfilter (7) versehen ist,  
der innere Beutel (2) für Blähungsgase durchlässig ist,  
und die äußeren (1) und inneren (2) Beutel im Bereich der Öffnung lösbar aneinander befestigt sind.

2. Drainagebeutel nach Anspruch 1,  
45 der ein Ostomie-Beutel ist.
3. Drainagebeutel nach Anspruch 1,  
bei dem die inneren (2) und äußeren (1) Beutel mit Hilfe einer aufreißbaren oder abschälbaren Verbindung oder eines Verbindungsgliedes lösbar aneinander befestigt sind.
- 50 4. Drainagebeutel nach einem der Ansprüche 1 - 3,  
bei dem die die Öffnung bildende Einrichtung ein Flansch (3) ist, auf dessen einer Seite sich ein Klebemittel (4) zum Anbringen des Beutels an einem Patienten befindet, und auf dessen anderer Seite die inneren (2) und äußeren (1) Beutel befestigt sind.
- 55 5. Drainagebeutel nach Anspruch 4,  
bei dem der äußere Beutel (1) aufbrechbar oder abziehbar an dem Flansch (3) befestigt ist.

6. Drainagebeutel nach Anspruch 5,  
bei dem der äußere Beutel (1) mit dem Flansch (3) verschweißt und von diesem aufgrund des Vorhandenseins einer Schwächungslinie (9) im Bereich der Verschweißung trennbar ist.
- 5 7. Drainagebeutel nach Anspruch 5,  
bei dem der äußere Beutel (1) an dem Flansch (3) entweder direkt oder über eine zusätzliche Schicht klebend an dem Flansch (3) befestigt ist.
8. Drainagebeutel nach einem der vorhergehenden Ansprüche,  
10 bei dem der innere Beutel (2) so geformt ist, daß er eine wasserundurchlässige Schicht (10a, 10b) und eine außerhalb hiervon angeordnete wasserlösliche Schicht (11a, 11b) aufweist.
9. Drainagebeutel nach Anspruch 8,  
15 bei dem der äußere Beutel (2) aus einem Polymerfilm gebildet ist, der auf einer seiner Oberflächen wasserundurchlässig und lediglich geringfügig wasserlöslich ist, während er auf seiner anderen Oberfläche stark wasserlöslich ist.
10. Drainagebeutel nach Anspruch 8,  
20 bei dem der innere Beutel (2) aus einem Material gebildet ist, das zwei aneinandergeschichtete Polymerfilme umfaßt, wobei ein Polymerfilm (10a, 10b) wasserundurchlässig ist, während der andere Polymerfilm (11a, 11b) wasserlöslich ist.
11. Drainagebeutel nach Anspruch 10,  
25 bei dem beide Polymerfilme im wesentlichen aus der gleichen Polymerart gebildet sind, wobei jedoch ein Film so behandelt wurde, daß er wasserundurchlässig gemacht wird.
12. Drainagebeutel nach Anspruch 11,  
bei dem die Polymerfilme angenähert die gleiche Dicke und Zugfestigkeit aufweisen.
- 30 13. Drainagebeutel nach Anspruch 8,  
bei dem die wasserlösliche Schicht ein wasserlösliches Polymer in faserförmiger Film-Netz- oder Textilform aufweist, das auf die wasserundurchlässige Schicht aufgeschichtet ist.
14. Drainagebeutel nach einem der Ansprüche 8 - 13,  
35 bei dem die wasserlösliche Schicht aus einem derartigen Material gebildet ist, daß sich zumindest 50 Gewichtsprozent in Wasser bei 50°C innerhalb von 10 Sekunden dispergieren oder auflösen.
15. Drainagebeutel nach einem der vorhergehenden Ansprüche,  
40 bei dem der innere Beutel (2) biologisch abbaubar ist.
16. Drainagebeutel nach einem der vorhergehenden Ansprüche,  
bei dem der innere Beutel (2) aus einem derartigen Material gebildet ist, daß eine im wesentlichen vollständige Zersetzung des Beutels innerhalb von 5 Tagen bei Eintauchen in ein schwach turbulentes Wasser eintritt.
- 45 17. Drainagebeutel zur Aufnahme von Körperausscheidungen nach einem der Ansprüche 1 - 14,  
bei dem der innere Beutel (2) aus einem Polymermaterial gebildet ist, dessen Innenoberfläche eine Beschichtung aus einem hydrophoben Material oder eine metallische Beschichtung oder eine abgeschiedene Metallschicht trägt, die im wesentlichen für Wasser undurchlässig ist.

## 50 Revendications

1. Poche de drainage destinée à recevoir des déchets corporels, la poche de drainage comprenant :  
une poche extérieure (1) ;  
55 une poche intérieure (2) imperméable à l'eau enfermée à l'intérieur de la poche extérieure (1), la poche intérieure (2) ayant une structure qui s'affaiblit lors de l'immersion dans une cuvette de W.-C. de façon à devenir molle et à être moins flottante, ce qui lui permet d'être facilement évacuée ;  
et des moyens (3) définissant un orifice pour permettre que les déchets corporels soient reçus par la poche



intérieure (2) ;  
caractérisée en ce que

la poche extérieure (1) est imperméable à l'eau et est formée d'un matériau qui sert de barrière aux gaz intestinaux ;

la poche extérieure (1) est pourvue d'un filtre de gaz intestinaux (7) ;

la poche intérieure (2) est perméable aux gaz intestinaux ;

et les poches extérieure (1) et intérieure (2) sont assujetties ensemble de manière détachable dans la zone de l'orifice.

2. Poche de drainage selon la revendication 1, qui est une poche d'ostomie.

3. Poche de drainage selon la revendication 1, dans laquelle les poches intérieure (2) et extérieure (1) sont assujetties ensemble de manière détachable grâce à un raccord ou une liaison cassant(e) ou pelable.

4. Poche de drainage selon l'une quelconque des revendications 1 à 3, dans laquelle les moyens définissant l'orifice sont un rebord (3), sur un côté duquel se trouve un adhésif (4) destiné à faire adhérer une poche sur un patient, et sur l'autre côté duquel sont fixées les poches intérieure (2) et extérieure (1).

5. Poche de drainage selon la revendication 4, dans laquelle la poche extérieure (1) est fixée de manière cassante ou pelable au rebord (3).

6. Poche de drainage selon la revendication 5, dans laquelle la poche extérieure (1) est soudée au rebord (3) et peut être détachée de celui-ci grâce à une ligne de faiblesse (9) située dans la zone de la soudure.

7. Poche de drainage selon la revendication 5, dans laquelle la poche extérieure (1) est assujettie de manière adhésive au rebord (3) soit directement, soit par l'intermédiaire d'une couche supplémentaire.

8. Poche de drainage selon l'une quelconque des revendications précédentes, dans laquelle la poche intérieure (2) est formée de façon à avoir une couche imperméable à l'eau (10a, 10b) et, placée à l'extérieur de celle-ci, une couche soluble dans l'eau (11a, 11b).

9. Poche de drainage selon la revendication 8, dans laquelle la poche intérieure (2) est formée d'un film polymère qui est imperméable à l'eau et soluble dans l'eau seulement de manière marginale sur une de ses surfaces et très soluble dans l'eau sur son autre surface.

10. Poche de drainage selon la revendication 8, dans laquelle la poche intérieure (2) est formée d'un matériau comprenant deux films polymères stratifiés ensemble, un film polymère (10a, 10b) étant imperméable à l'eau et l'autre film polymère (11a, 11b) étant soluble dans l'eau.

11. Poche de drainage selon la revendication 10, dans laquelle les deux films polymères sont formés sensiblement du même type de polymère, mais dans laquelle un film a été traité pour le rendre imperméable à l'eau.

12. Poche de drainage selon la revendication 11, dans laquelle les films polymères ont approximativement la même épaisseur et la même résistance à la traction.

13. Poche de drainage selon la revendication 8, dans laquelle la couche soluble dans l'eau comprend un polymère soluble dans l'eau sous la forme d'un film, d'un filet ou d'un tissu fibrillé, stratifié à la couche imperméable à l'eau.

14. Poche de drainage selon l'une quelconque des revendications 8 à 13, dans laquelle la couche soluble dans l'eau est formée d'un matériau tel qu'au moins 50 % en poids se dispersent ou se dissolvent dans l'eau à 50° C en 10 secondes.

15. Poche de drainage selon l'une quelconque des revendications précédentes, dans laquelle la poche intérieure (2) est biodégradable.

16. Poche de drainage selon l'une quelconque des revendications précédentes, dans laquelle la poche intérieure (2) est formée d'un matériau tel que la décomposition sensiblement complète de la poche survient après cinq jours

d'immersion dans une eau doucement turbulente.

- 5 17. Poche de drainage destinée à recevoir des déchets corporels, selon l'une quelconque des revendications 1 à 14, dans laquelle la poche intérieure (2) est formée d'un matériau polymère dont la surface intérieure porte un revêtement de matériau hydrophobe ou un revêtement métallique ou une couche métallique déposée qui est sensiblement imperméable à l'eau.

10

15

20

25

30

35

40

45

50

55

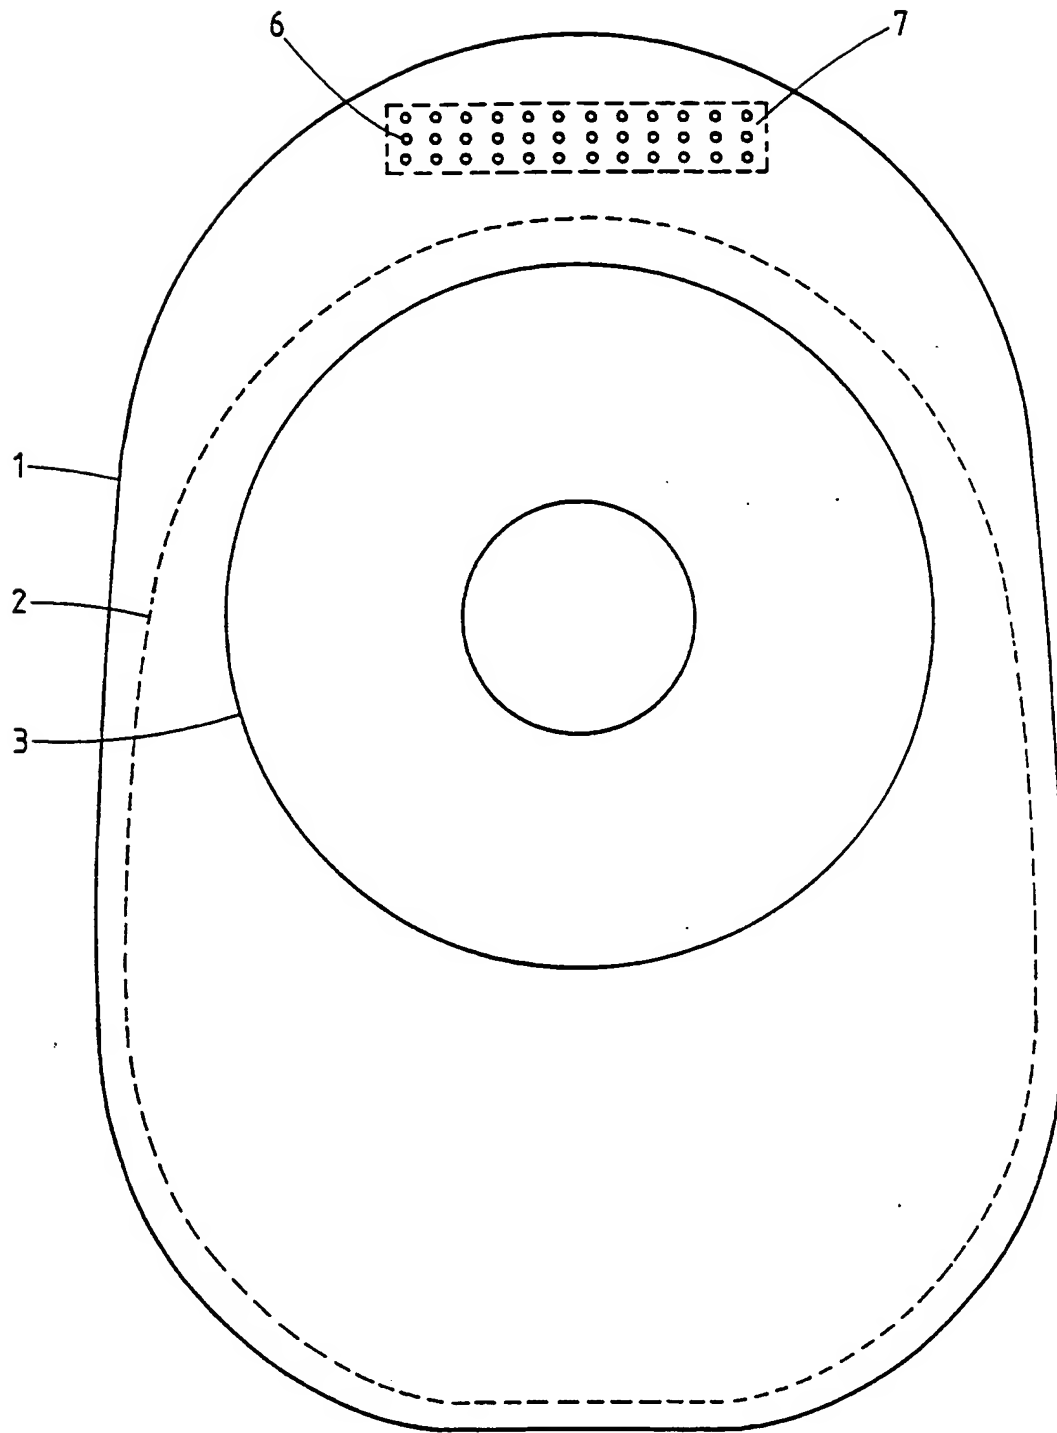


Figure 1

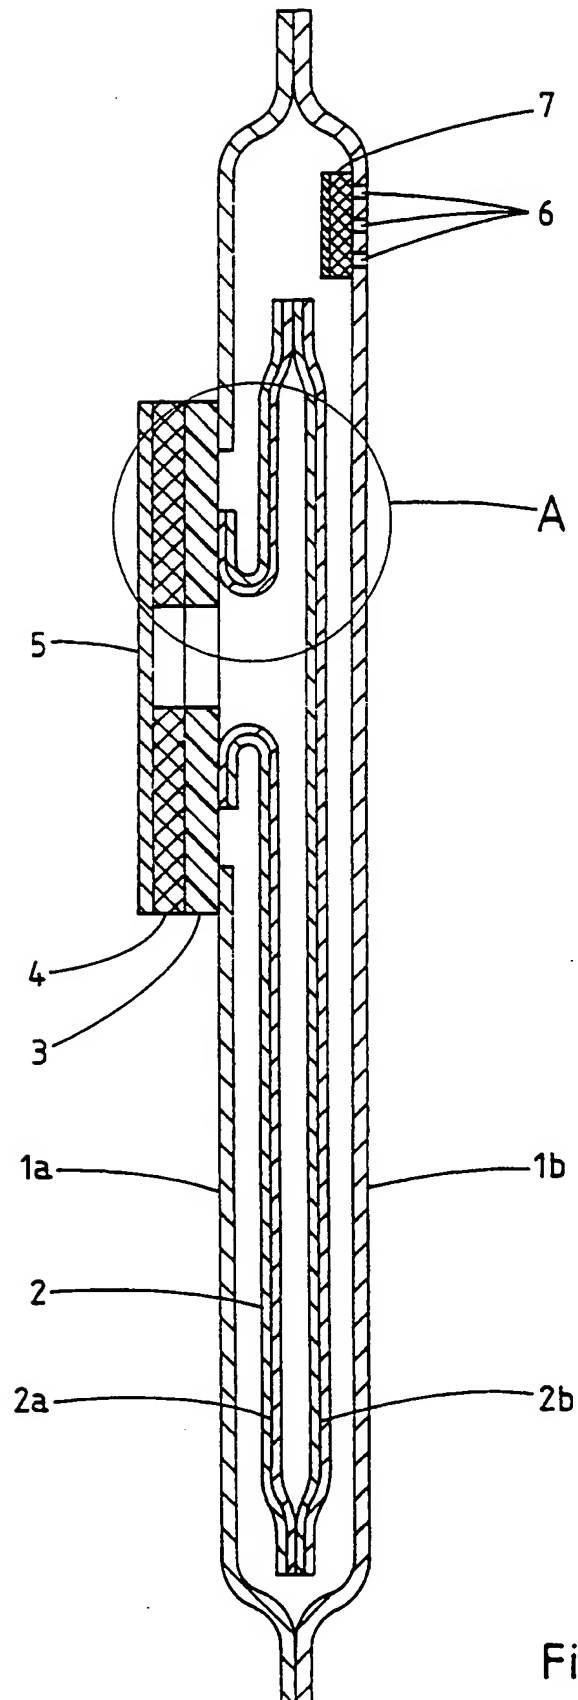


Figure 2

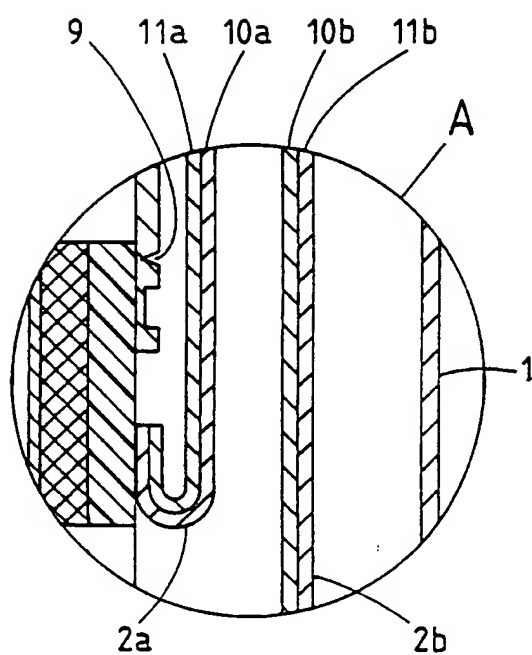


Figure 2A

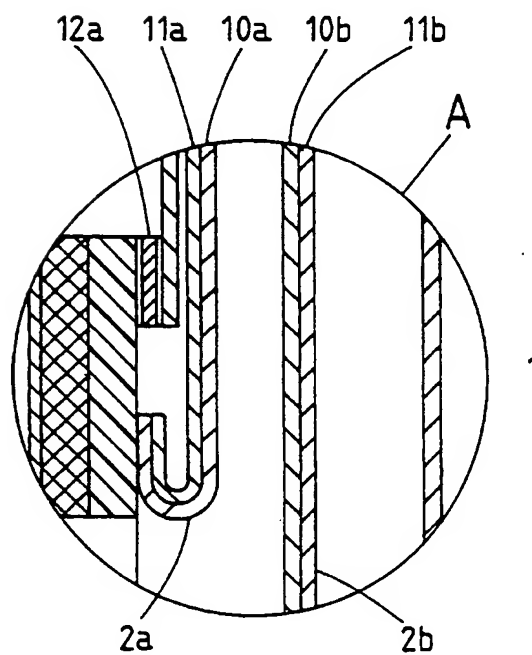


Figure 2B

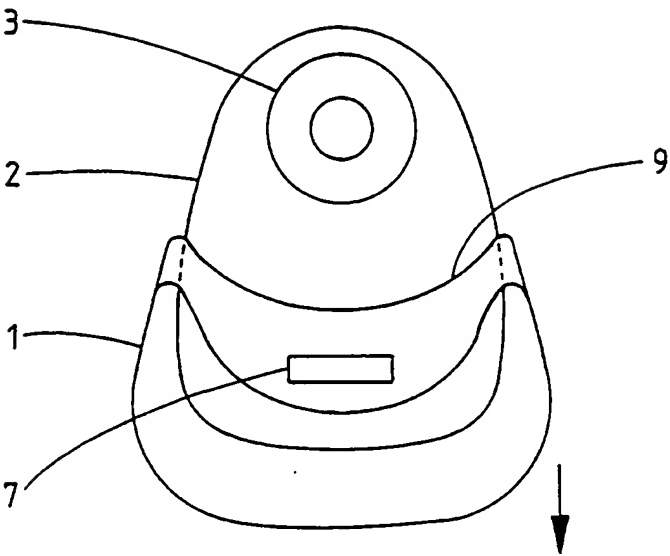


Figure 3

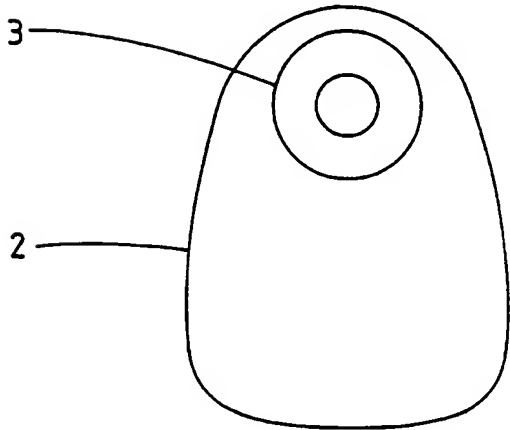


Figure 4

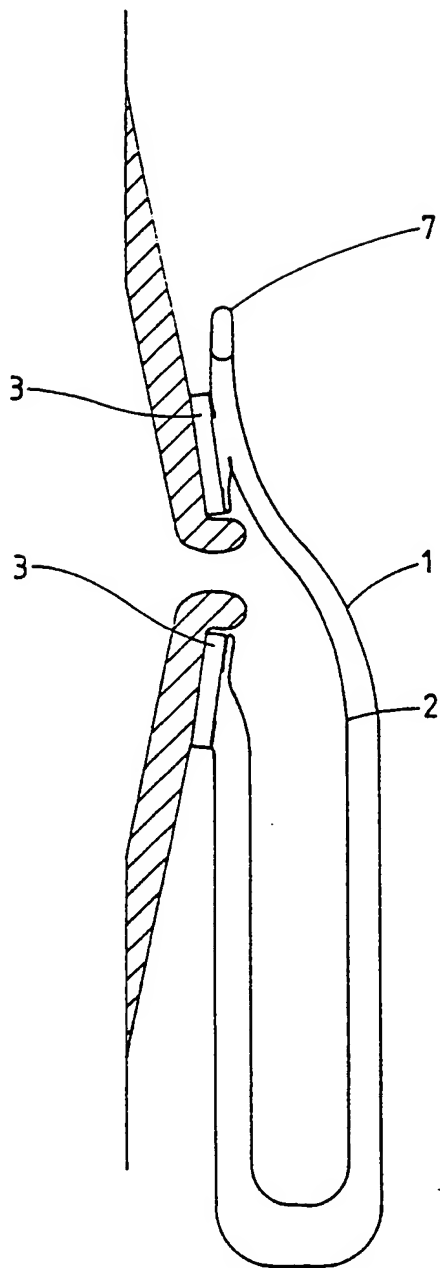


Figure 5

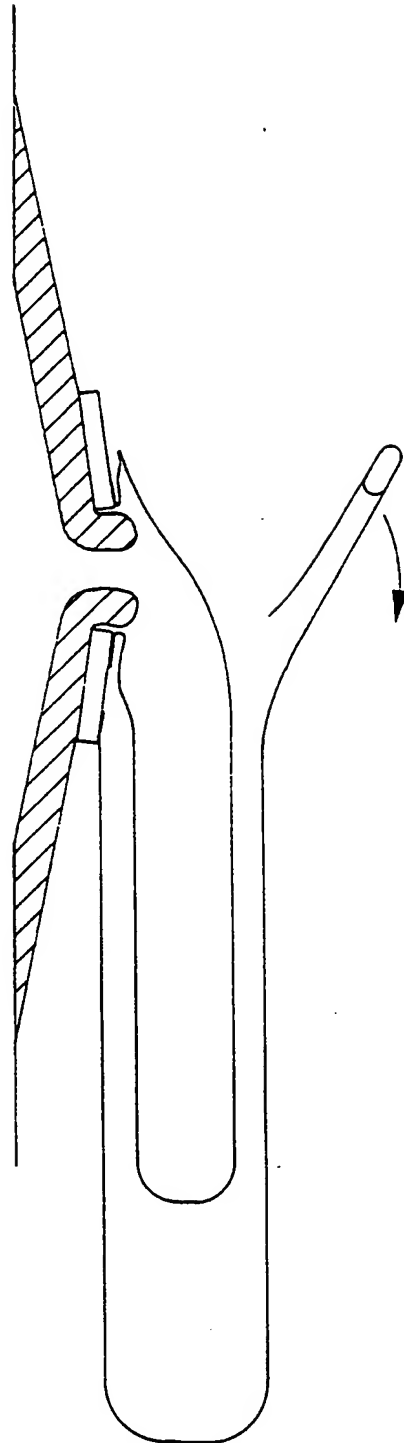


Figure 6